

VW2500C-200/10N

Four-Headed Rocking Piston

Max. Flow **15 cfm (425 lpm)**
 Max. Pressure **174 psi (12 bar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Stainless-steel valves
- Field service ability
- Thermal protected motor
- Other voltage and configurations available upon request


QuadriPlus™

Specification

Open Flow	15 CFM (425 LPM)
Max. Pressure	174 PSI (12 bar)
Rated Power	3.7 HP (2.7 kw)
Voltage/Frequency	208V / 60 HZ (3 phase)
Sound Level	80 \leq db
Thermal Protection	257 \leq 5% °F / (125 \leq 5% °C)
Inlet Port	25 mm (with other options)
Exhaust Port	M22 X 1.5 mm (with other options)
Net Weight	101.4 lb (46 kg)

Performance Chart

Flow vs Pressure

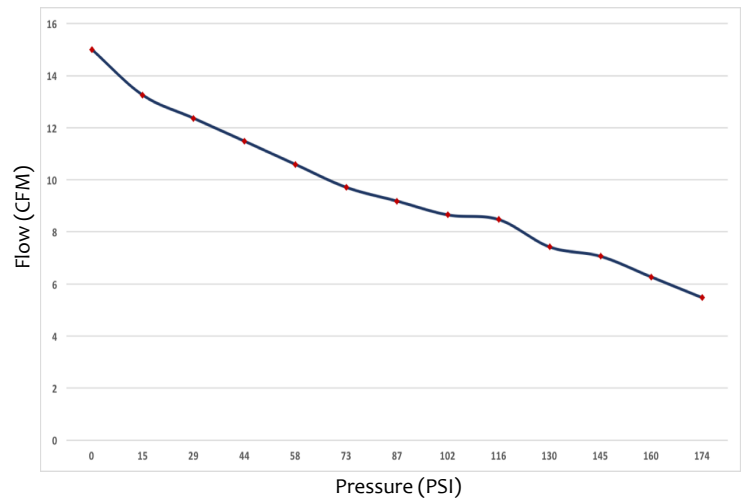

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawing

