



## QuadriPlus™

### VW2500

#### Four-Headed Rocking Piston

Max. Flow **500 lpm (17.7 cfm)**


Max. Pressure **12 bar (174 psi) intermittent**  
**10 bar (145 psi) continuous**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Stainless-steel valves
- Field service ability
- Thermal protected motor
- Other voltage and configurations available upon request

#### Specification

Model Number	VW2500J-200/10N	VW2500C-200/10N
Open Flow	425 lpm(15 cfm)	500 lpm (17.7 cfm)
Max. Pressure	12 bar(174 psi)	
Rated Power	2.7 kw(3.7HP)	
Voltage/Frequency	208V / 60 HZ (3 phase)	380V / 50Hz (3 phase)
Sound Level	≤ 80db	
Thermal Protection	125±5% °C (257±5% °F)	
Inlet Port	25 mm (with other options)	
Exhaust Port	M22 X 1.5 mm (with other options)	
Net Weight	46 kg (101.4 lb)	

#### Performance Chart

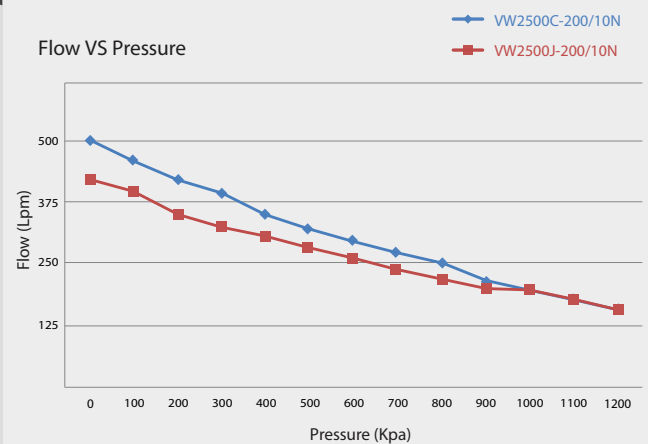

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

#### Technical Drawings

