








+1 (920) 234 5113   
 +852 2635 2285   
 +44 (0) 7506 414504   
 +52 1 (442) 343 3172   
 email: [info@gseint.com](mailto:info@gseint.com)  
 web: [www.gseint.com](http://www.gseint.com)



## Twin-Headed Diaphragm

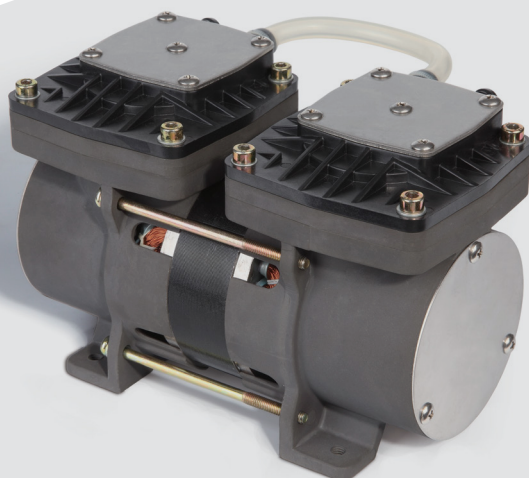ZG50V

Max. Flow **0.85 cfm (24 lpm)**

Max. Vacuum **27.1"Hg (920 mbar)**


- Permanently lubricated bearings
- Compact twin head diaphragm vacuum pump
- Work under high moisture environment
- Good for small autoclave
- Low noise level (58 dBA @ 0 Kpa)

### Specification

Model Number	ZG50AV-24/-0.92
Open Flow	0.85 cfm (24 lpm)
Max. Continuous Vacuum	27.1"Hg (920 mbar)
Current At Rated Load	0.6A
Power At Rated Load	100W
Motor Type	PSC
Voltage/Frequency	220V/50Hz
Starting Current	0.65A
Net Weight	7.9 lbs (3.6kg)

### Performance Chart

Flow VS Vacuum

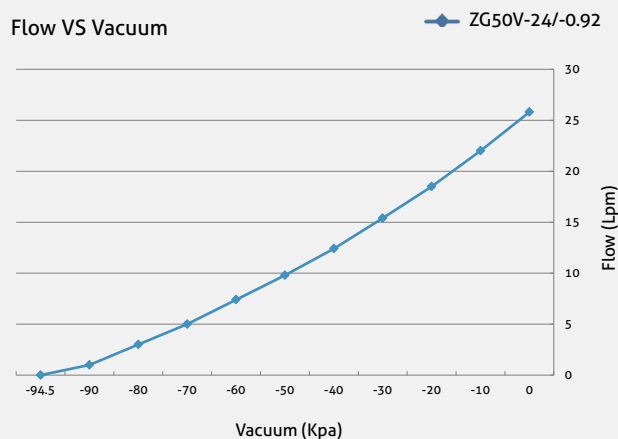

*The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.*

### Technical Drawings

