

Twin Headed Rocking Piston

ZW300




Max. Flow **3.5 cfm (99 lpm)**
 Max. Pressure **33.4 psi (2.3 bar)**
 Max. Vacuum **25.4"Hg (-860 mbar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Thin wall cylinder for good heat transfer
- Stainless-steel valves
- Capacitor as standard
- Field service ability
- Recoverable thermally protected motor
- Other voltages and configurations available upon request

Specification

Model Number	ZW300A-53/2	ZW300A-75/1.4	ZW300D2-75/1.4
Open Flow	2.79cfm (79lpm)	3.49cfm (97lpm)	3.9cfm (99lpm)
Max. Continuous Pressure	33.4 psi (2.3bar)	29 psi (2bar)	
Max. Continuous Vacuum	25.1"Hg (-850 mbar)	25.4"Hg (-860 mbar)	
Current At Rated Load	1.5A	1.45A	3.1A
Power At Rated Load	320W	370W	340W
Motor Type	PSC		
Voltage Range	220V/50Hz		115V/60Hz
Starting Current	4.5A	5A	7.5A
Net Weight	12.1 lbs (5.5kg)	12.8 lbs (5.8kg)	12.7 lbs (5.75kg)

Performance Chart

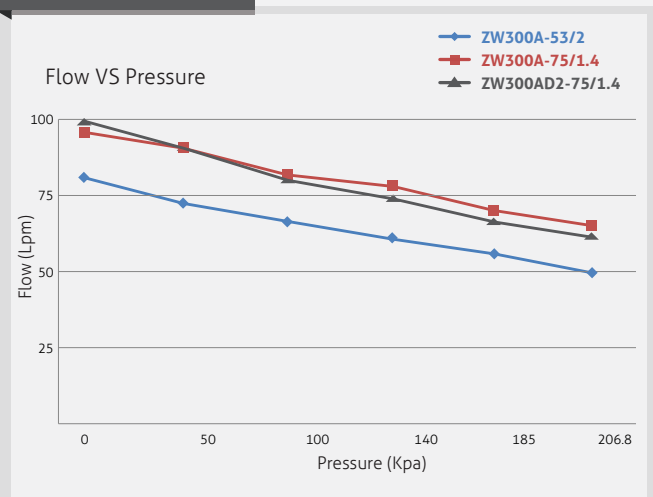

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

