








+1 (920) 234 5113 
 +852 2635 2285 
 +44 (0) 7506 414504 
 +52 1 (442) 343 3172 
 email: info@gseint.com
 web: www.gseint.com

Rocking Piston

ZWS170

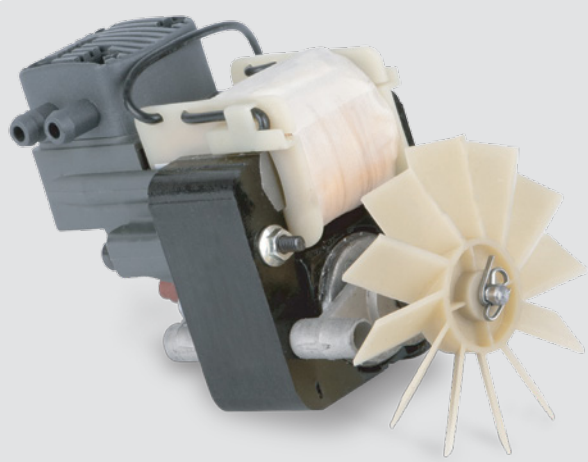


Max. Flow **0.32 cfm (9 lpm)**
 Max. Pressure **22 psi (1.5 bar)**

- Oil-less, non-lubricated cup and cylinder •
- Highly reliable •
- Field service ability •
- Thermally protected motor •
- Other voltages and configurations • available upon request

Specification

	ZWS170A-6.7/0.8	ZWS170D2-6.7/0.8
Model Number	ZWS170A-6.7/0.8	ZWS170D2-6.7/0.8
Open Flow	0.32 cfm (9 lpm)	0.32 cfm (9 lpm)
Max. Continuous Pressure	22 psi (1.5 bar)	22 psi (1.5 bar)
Max. Continuous Vacuum	N/A	N/A
Current At Rated Load	0.8A	1.3A
Power At Rated Load	75W	70W
Motor Type	Shared Pole	Shared Pole
Voltage/Frequency	220V/50Hz	115V/60Hz
Starting Current	0.8A	1.3A
Net Weight	2.4 lbs (1.1kg)	2.4 lbs (1.1kg)

Performance Chart

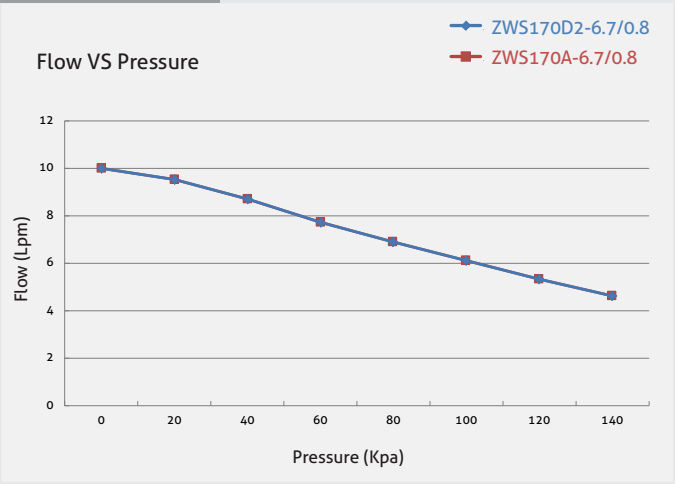

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

