






+1 (920) 234 5113 
 +852 2635 2285 
 +44 (0) 7506 414504 
 +52 1 (442) 343 3172 
 email: info@gseint.com
 web: www.gseint.com

Single-Headed Rocking Piston

ZWS250

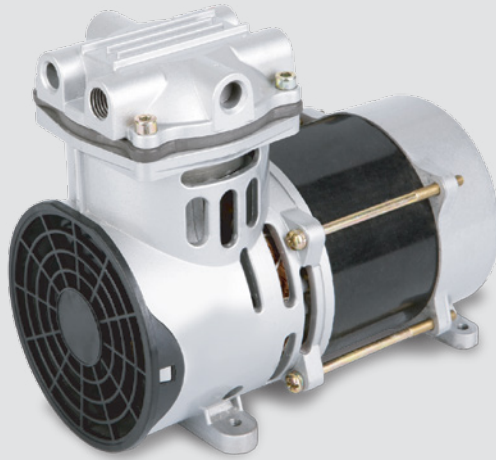


Max. Flow **1.6 cfm (45.5 lpm)**
 Max. Pressure **44 psi (3 bar)**
 Max. Vacuum **26"Hg (880 mbar)**

- Oil-less, non-lubricated cup and cylinder •
- Long-life cup design •
- Field service ability •
- Recoverable thermally protected motor •
- Other voltages and configurations • available upon request

Specification

Model Number	ZWS250A-24/3	ZWS250B2-30/3
Open Flow	1.3 cfm (38 lpm)	1.6 cfm (45.5 lpm)
Max. Continuous Pressure	36 psi (2.5 bar)	44 psi (3 bar)
Max. Continuous Vacuum	26"Hg (880 mbar)	26"Hg (880 mbar)
Current At Rated Load	1.9A	2.5A
Power At Rated Load	300W	240W
Motor Type	PSC	PSC
Voltage/Frequency	220V/50Hz	110V/60Hz
Starting Current	3.8A	8.5A
Net Weight	11.7 lbs (5.3 kg)	11.7 lbs (5.3 kg)

Performance Chart

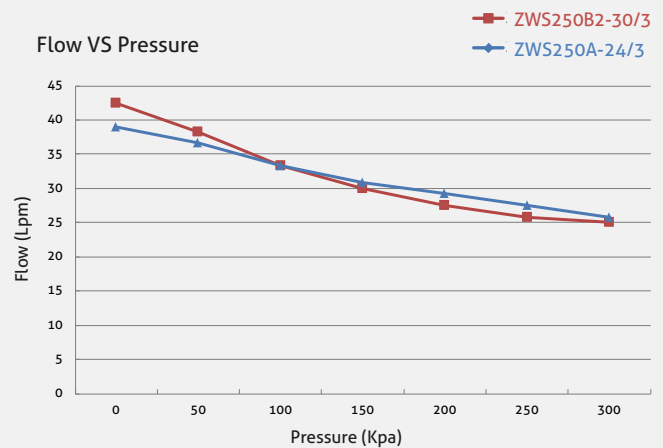

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

